

HA350EPump


A Strong Whirlpool Pump

- Economic pump
- High performance
- 3 Way Mounting Solution
- Silent running compact design
- Both pneumatic and electronic use






PerformanceCurve

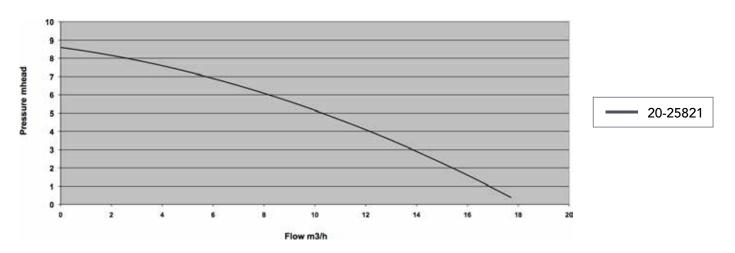

PumpDimensions

Self-drain



HA350E, 0.45kW

ARTICLE NO.	POWER (P1)	V/HZ/A	PNEUMATIC (PRESENT FOR ELEC. USE)	SELF DRAIN
20-25821*	0.45kW	220-240V /2.0A	X	X

^{*} Available in bulk upon request 35-xxxxx. Replace Article No. 20 with 35 before ordering.

ButtressThread (2.50")

O-Ring mounted on union

PUMP UNION, STRAIGHT 92015M 50 mm I.D.

92015N 11/2" I.D.



STANDARD GLUE CONNECTION Discharge Tee

20-0425 2 X 32 mm I.D. X 50 mm O.D.



PUMP UNION WITH DISCHARGE TEE

92020M 2 X 32 mm I.D. 92020 2 x 1" I.D

92030 2 x 26 mm O.D



InstallationHA350E



There are different ways of installing the pump

1. The easy accessible rubber feet allow quick installation of the pump, by screwing 4 pcs. of M6 bolts up into the nuts, that are integrated in the rubber feet.



- 2. Install the pump by adding the mouting plate (247012). The 10mm nut and pole makes installation of the pumpe easy on the pump stand
- 3. Use the one point mounting slide for easy installation.

